

Braeburn®

7320

Up to 3 Heat / 2 Cool Heat Pump
Up to 2 Heat / 2 Cool Conventional
Smart Wi-Fi Universal Thermostat

BlueLink
smart connect



5 YEAR
LIMITED
WARRANTY

Phone not included.

Thermostat Features

- 7 Day, 5-2 Day or Non-Programmable
- Large 6.5 sq. in. Easy-Read Touchscreen
- Bright Blue Backlight Display
- Auto or Manual Changeover
- Residential or Commercial Modes
- Adjustable Temperature Limits
- Wireless or Wired Remote Sensing
- Auxiliary Heat Fossil Fuel Option
- Hardwire or Battery Powered
- Humidification and Dehumidification Control with 7330 Wireless Sensor
- Auxiliary "A" Terminal for Economizer, Fresh Air or Output Control
- Common "C" wire required to use Wi-Fi

Application Features

- Compatible with Virtually All Smartphones, Tablets or PC's
- Multi-Color Program Groups Simplify Scheduling
- Text and E-Mail Service and Temperature Alerts
- QuickCopy™ Allows User to Duplicate Program and Configuration to Other Thermostats
- QuickEdit™ Makes Schedule Changes Easy
- BlueLink SmartData™ Energy Report Capability
- Monitor and Control Multiple Thermostats
- View Outdoor Temperature*
- Adjust and View Indoor Humidity*
- Easy Access Dealer Information
- Help Screens Guide User Through Application

FREE Contractor Branding!
Visit braeburnonline.com



www.bluelinksmartconnect.com

*Optional sensor required.

Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)

BlueLink Smart Connect® Application Screens

Multi-Color Program Groups

Simplifies program scheduling by allowing user to group days and walk through programming set points, times and temperatures quickly and easily.




BlueLink SmartData™ Energy Reports

Gives the user the capability of retrieving usage data for individual thermostats for specific time periods.




QuickCopy™ Feature

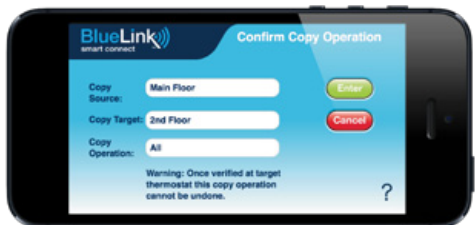

Service and Temperature Alerts



Service Dealer Information

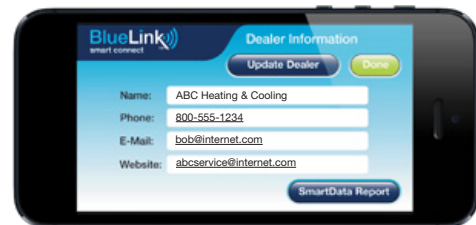

Product Specifications

Dimensions:	3.94" x 5.56" x 1.19"
Electric Rating:	24 Volt AC (18-30 Volt AC) 1 amp maximum load per terminal 6 amp total maximum load (all terminals)
AC Power:	18-30 Volt AC (required for Wi-Fi)
DC Power:	3.0 Volts DC (2 "AA" Alkaline batteries included)
Compatibility:	Heat pump systems up to 3 heat/2 cool, Conventional systems up to 2 heat/2 cool
Wi-Fi Communication:	802.11 (requires 24 VAC with C wire)
Control Range:	45° to 90° F (7° to 32° C)
Display Range:	40° to 99° F (5° to 37° C)
Accuracy:	+/- 1° F (+/- .5° C)
Terminations:	Rh, Rc, C, W2/AUX, W1/E, L, A, O/B, G, Y2, Y1, K, S2, S1

Shipping Information

INDIVIDUAL CARTON
Dimensions: 5.0" x 6.0" x 2.5"
Weight: 1.2 lbs.

MASTER CARTON
Quantity: 3
Dimensions: 7.25" x 6.25" x 5.4"
Cubic Feet: .14
Weight: 3.85 lbs.

Braeburn 7320 Replaces*

Honeywell® TH8320WF, TH6320WF,
TH9320WF, TH8732WF
Emerson® 1F86U-42WF

Pro1® T855i, T701i
Nest® T100577, T200577, T3007ES
Venstar® T7850, T7900

*Verify specific application requirements. All trademarks are the property of their respective owners.

Accessories

7330 Wireless Remote Humidity Sensor
7340 Share-a-Wire™ Module
7390 Wireless Remote Indoor Sensor
7490 Wireless Remote Outdoor Sensor

2950 Universal Wall Plate (6.5" x 6.5" x .125")
5390 Wired Remote Indoor Sensor
5490 Wired Remote Outdoor Sensor
5970 Universal Thermostat Guard

FREE Contractor Branding Available! Visit our website (www.braeburnonline.com) for more information, contact your local distributor or call our sales department toll-free at 866.268.5599 (U.S.), +1.630.844.1968 (Outside the U.S.).

Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.