


PARAPET CLAMP GUARDRAIL SYSTEM

GUARDRAIL

FOR MORE INFO, PLEASE CALL
1.800.466.6385 OR VISIT GUARDIANFALL.COM

FEATURES & BENEFITS:

- FITS WIDE RANGE OF PARAPETS
- SET-UP OSHA COMPLIANT GUARDRAIL SYSTEM
- LIGHTWEIGHT - ONLY TAKES ONE PERSON TO INSTALL
- DURABLE, NON-CORROSIVE COMPONENTS
- POWDER COATED STEEL MAKES IT RESISTANT TO CORROSION AND DAMAGE

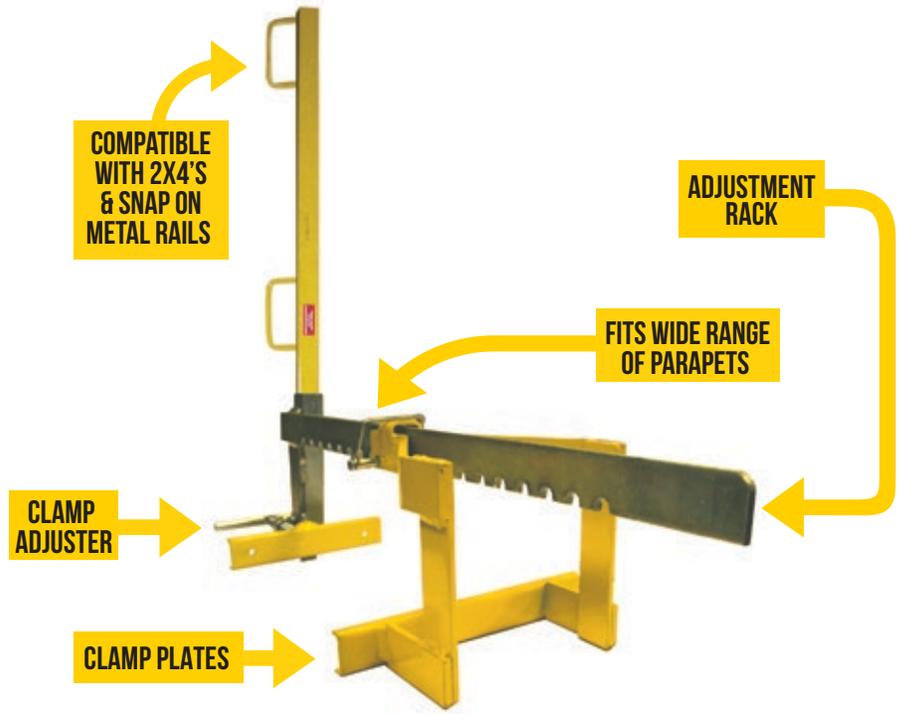

SPECS

STANDARDS:

OSHA 1910 & 1926 SUBPART M

MATERIALS:

POWDER-COATED STEEL AND GALVANIZED STEEL

MORE SPECS & REQUIREMENTS:

- FITS ANY PARAPET FROM 4-24 INCHES IN WIDTH
- MINIMUM PARAPET WALL HEIGHT: 7"
- PARAPET CLAMPS MAY BE PLACED A MAXIMUM OF 8' APART
- CLAMP ADJUSTER MUST FACE IN TOWARDS WORK SURFACE

- FOR USE IN COMBINATION WITH 42" GUARDRAIL POST (PART # 15175) AND 2" OR 4" OR 2" X 6" CONSTRUCTION GRADE LUMBER GUARDRAILS. GUARDRAILS MUST OVERLAP AT LEAST 12" AT EACH END.
- CP MUST ENSURE PARAPET CLAMP GUARDRAIL SYSTEM WILL WITHSTAND THE FOLLOWING MINIMUM FORCES:
TOPRAIL: 200 LBS MIDRAIL: 15 LBS

DESCRIPTION: PARAPET CLAMP GUARDRAIL

PART #: 15170

WEIGHT: 15 LBS, 24 LBS WITH INCLUDED POST

PARAPET CLAMPS ARE SUITABLE FOR THE FOLLOWING APPLICATIONS:



FALL PREVENTION:

Parapet Clamp Guardrail Systems may be used in Fall Prevention applications ONLY:

- Fall Prevention Systems are placed around the leading edges of any and all fall hazards to prevent a worker from going over an edge and may be used in substitute of Fall Protection or safety netting systems.
- Installation requirements for C-Slab Grabber Guardrail Systems set forth in equipment instructions MUST be adhered to.
- Fall Arrest, Work Positioning, Climbing, Rescue, and any other systems must NEVER be connected to Fall Prevention Systems.