SUBMITTAL DRAWING


DATE: 5/16/03

SUBMITTED BY:

JOB NAME:
LOCATION:
ARCHITECT:
ENGINEER:

AMERI-FLEX DOUBLE WALL FLEX CONNECTOR (3, 4, 5ADFC)

DRAWING #: B3-10

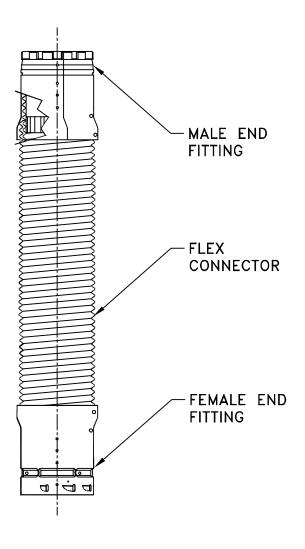



• MATERIALS: FLEXIBLE TUBE (2 LAYERS): .012 ALUMINUM INNER FITTINGS: .012 ALUMINUM

OUTER FITTINGS: .018 G-90 GALVANIZED

- FOR USE WHERE TYPE B GAS VENT IS REQUIRED
- DO NOT ENCLOSE. DO NOT PASS THROUGH COMBUSTIBLE WALLS, FLOORS, OR CEILINGS
- 1 INCH MINIMUM CLEARANCE TO COMBUSTIBLE CONSTRUCTION PER THE INSTALLATION INSTRUCTIONS
- 3, 4 AND 5 INCH DIAMETERS
- •2, 3, 4 AND 5 FOOT LENGTHS