


Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX F1960 tees for use with PEX-a potable water expansion systems.

PEX F1960 Tees

Qty	Stk. #	Size (run × run × branch)	Dimension, in/(mm)											Weight, lb/(kg)
			A	B	C	D	E	F	G	H	ID1	ID2	ID3	
	EX16555	½" × ½" × ½"	0.71 (18.0)	0.52 (13.3)	0.52 (13.3)	0.71 (18.0)	0.43 (10.9)	0.95 (24.1)	0.71 (18.0)	0.43 (10.9)	0.41 (10.3)	0.41 (10.3)	0.41 (10.3)	0.019 (0.009)
	EX16222	¾" × ¾" × ¾"	0.94 (24.0)	0.68 (17.3)	0.68 (17.3)	0.94 (24.0)	0.56 (14.1)	0.69 (17.5)	0.94 (24.0)	0.56 (14.1)	0.61 (15.5)	0.61 (15.5)	0.61 (15.5)	0.037 (0.017)
	EX16888	1" × 1" × 1"	1.18 (29.9)	0.80 (20.4)	0.80 (20.4)	1.18 (29.9)	0.68 (17.3)	0.80 (20.3)	1.18 (29.9)	0.68 (17.3)	0.81 (21.6)	0.81 (21.6)	0.81 (21.6)	0.068 (0.031)

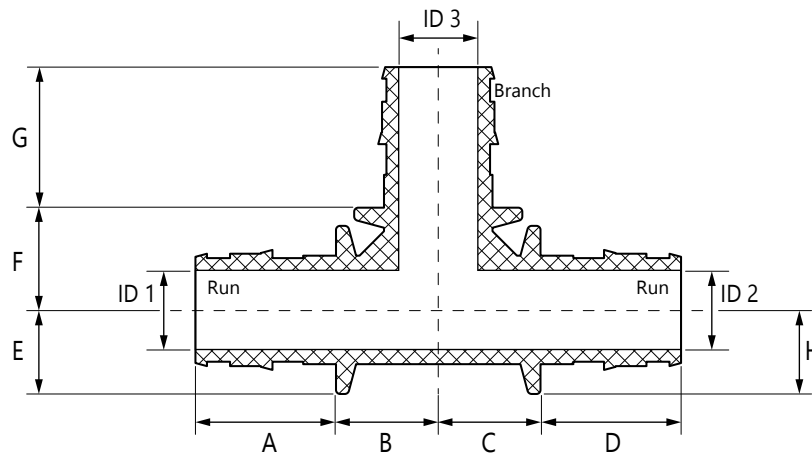

Technical Data

Specifications	
Material	PPSU
Operating Pressure rating	180°F @ 100psi (82.2°C @ 0.69MPa)

Listings


cNSFus-pw-G
Codes
IAPMO UPC

Standards

ASTM F1960 NSF/ANSI 14
ASTM F877 NSF/ANSI 61
CSA B137.5 NSF/ANSI 372

PEX F1960 Reducing Tees

Qty	Stk. #	Size (run × run × branch)	Dimension, in/(mm)										Weight, lb/(kg)	
			A	B	C	D	E	F	G	H	ID1	ID2		ID3
	EX16225	¾" × ¾" × ½"	0.94 (24.0)	0.56 (14.1)	0.56 (14.1)	0.94 (24.0)	0.56 (14.1)	0.56 (14.1)	0.71 (18.0)	0.56 (14.1)	0.61 (15.5)	0.61 (15.5)	0.41 (10.3)	0.019 (0.009)
	EX16252	¾" × ½" × ¾"	0.94 (24.0)	0.57 (14.5)	0.49 (12.5)	0.71 (18.0)	0.56 (14.1)	0.56 (14.1)	0.94 (24.0)	0.43 (10.9)	0.61 (15.5)	0.41 (10.3)	0.61 (15.5)	0.019 (0.009)
	EX16255	¾" × ½" × ½"	0.94 (24.0)	0.57 (14.5)	0.49 (12.5)	0.71 (18.0)	0.56 (14.1)	0.56 (14.1)	0.71 (18.0)	0.43 (10.9)	0.61 (15.5)	0.41 (10.3)	0.41 (10.3)	0.025 (0.011)
	EX16552	½" × ½" × ¾"	0.71 (18.0)	0.70 (17.8)	0.70 (17.8)	0.71 (18.0)	0.43 (10.9)	0.43 (10.9)	0.94 (24.0)	0.43 (10.9)	0.41 (10.3)	0.41 (10.3)	0.61 (15.5)	0.023 (0.010)
	EX16822	1" × ¾" × ¾"	1.18 (29.9)	0.69 (17.5)	0.68 (17.3)	0.94 (24.0)	0.68 (17.3)	0.78 (19.8)	0.94 (24.0)	0.56 (14.2)	0.81 (21.6)	0.61 (15.5)	0.61 (15.5)	0.045 (0.020)
	EX16828	1" × ¾" × 1"	1.18 (29.9)	0.78 (19.9)	0.84 (21.3)	0.94 (24.0)	0.68 (17.3)	0.81 (20.6)	1.18 (29.9)	0.56 (14.2)	0.81 (21.6)	0.61 (15.5)	0.81 (21.6)	0.051 (0.023)
	EX16882	1" × 1" × ¾"	1.18 (29.9)	0.69 (17.5)	0.69 (17.5)	1.18 (29.9)	0.68 (17.3)	0.68 (17.3)	0.94 (24.0)	0.68 (17.3)	0.81 (21.6)	0.81 (21.6)	0.61 (15.5)	0.043 (0.020)
	EX16885	1" × 1" × ½"	1.18 (29.9)	0.69 (17.5)	0.69 (17.5)	1.18 (29.9)	0.68 (17.3)	0.78 (19.8)	0.71 (18.0)	0.68 (17.3)	0.81 (21.6)	0.81 (21.6)	0.41 (10.3)	0.047 (0.021)

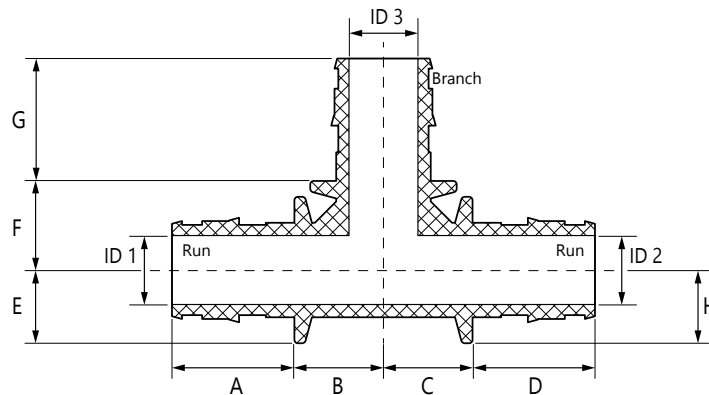

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty